

Any Weather / Long Distance / Plug-N-Play

# Bantam-4M

BULLET




## 4MP Infrared IP Camera

## Features

- 820 Feet Video/Audio/Power over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- IP67 Weatherproof – Indoor or Outdoor
- Wide Temperature Rating: -40° below to +140° F
- WDR (Sony's 120dB Wide Dynamic Range)
- 1/3" 4.0 megapixel, progressive scan, CMOS
- 4 Megapixel Resolution (2592x1520 max) – H.264/H.265/MJPEG options - Triple Stream capable
- 3.6mm Fixed Megapixel Lens
- Optically Clear Glass front protecting the lens
- Up to 100' Infrared Illumination with Intensity-Controlled Smart IR's
- 16 Corridor Mode (Great for Hallways or narrow alleys)
- Supports POE and/or 12V DC (will fail-over to 12V if POE is lost) w/ wide voltage range of + or - 25%
- 2D and 3D Digital Noise Reduction options

## Dimensions

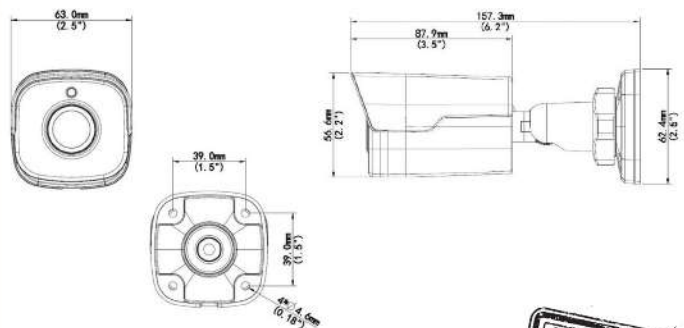

We guarantee at least 820' for Power & Video



201 N. Elm St.  
Kemp, TX 75143

**ENVIRO**  
cams

866-264-0041  
sales@envirocams.com

Not Your Father's IP Cameras



Any Weather / Long Distance / Plug-N-Play

# Bantam Specifications



Camera	
Sensor	1/3", 4.0 megapixel, progressive scan, CMOS
Lens	3.6mm @F1.8
Angle of View(H)	80.8°
Shutter	Auto/Manual, 1/6 ~ 1/100000s
Min. Illumination	Colour: 0.02 Lux (F1.8, AGC ON) / 0 with IR on
IR Range	100 ft IR range
Day/Night	IR-cut filter with auto switch (ICR)
S/N	>52dB
WDR	Optical WDR (up to 120 dB)
Noise Reduction	2D/3D

Video	
Max. Resolution	2592x1520
Video Compression	H.265, H.264, MJPEG
Frame Rate	4MP (2592x1520): Max. 20 fps; 4MP (2560x1440): Max. 25 fps 3MP (2048x1520): Max. 30 fps; 1080P (1920x1080): Max. 30 fps
Video Streaming	Triple
9:16 Corridor Mode	Supported
Region Of Interest	Supported
HLC	Supported
Evaluative Metering	Supported
OSD	Up to 8 OSDs
Motion Detection	Up to 2 areas
Privacy Mask	Up to 4 areas

Smart	
Behavior Detection	Intrusion, crossing line, motion detection
Intelligent Identification	Face detection, Defocus, Scene Change
Statistical Analysis	People counting

Network	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x
Compatible Integration	ONVIF,API

Interface	
Network	1 RJ45 10M/100M Base-TX Ethernet

General	
Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: Max 6.4W
Dimensions (Ø x H)	6.2"x2.5"x2.5"
Weight	1lb
Working Environment	-40°C ~ +60°C (-40°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)
Ingress Protection	IP67

## Optional Mounts Available



## Unequaled Product Testing

-  QUALITY
-  RELIABILITY
-  DISTANCE
-  ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info



201 N. Elm St.  
Kemp, TX 75143



866-264-0041  
sales@envirocams.com

Not Your Father's IP Cameras