

Any Weather / Long Distance / Plug-N-Play

N-Range

BULLET




2MP Infrared IP Camera with Motorized Lens

Features

- 820 Feet Video/Audio/Power over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- IP67 Weatherproof – Indoor or Outdoor
- IK10 Impact rated (represents more than 20 joules of impact)
- Wide Temperature Rating: -40° below to +140° F
- WDR (Sony's 120dB Wide Dynamic Range)
- 1/2.9" 2 Megapixel (1080p) Progressive Scan CMOS
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options - Triple Stream capable
- 2.8-12mm Varifocal Auto-Focus Megapixel Zoom Lens
- Optically Clear Glass front protecting the lens
- Up to 100' Infrared Illumination with Intensity-Controlled Smart IR's
- Audio and Alarm inputs and outputs
- 16 Corridor Mode (Great for Hallways or narrow alleys)
- Supports POE and/or 12V DC (will fail-over to 12V if POE is lost) w/ wide voltage range of + or - 25%
- Optional Onboard Micro SD Card for stand-alone or POE loss Recording – with Automatic Download to NVR when POE is restored
- 2D and 3D Digital Noise Reduction options

Dimensions

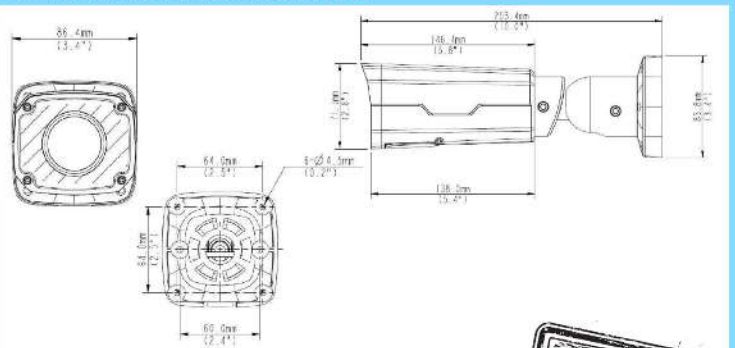

We guarantee at least 820' for Power & Video



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras

N-Range Specifications



Camera	
Sensor	1/2.9", 2 megapixel, progressive scan CMOS
Lens	2.8~12mm @F1.4
Angle of View(H)	90° ~ 28°
Zoom/Focus	Motor Drive
Shutter	Auto/Manual, 1/6 ~ 1/100000s
Min. Illumination	Colour: 0.02 Lux (F1.4, AGC ON) / 0 with IR on
IR Range	100 ft IR range
Day/Night	IR-cut filter with auto switch (ICR)
S/N	>52dB
WDR	Optical WDR (up to 120 dB)
Noise Reduction	2D/3D
Video	
Max. Resolution	1920x1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	1080P (1920x1080): Max. 30 fps, 720P(1280x720): Max. 30 fps, D1(720x576) Max 30fps
Video Streaming	Triple
9:16 Corridor Mode	Supported
Region Of Interest	Supported
HLC	Supported
Evaluative Metering	Supported
OSD	Up to 8 OSDs
Privacy Mask	Up to 8 areas
Smart	
Behavior Detection	Intrusion, crossing line, motion detection
Exception Detection	Audio Detection
Intelligent Identification	Face detection, Defocus, Scene Change
Statistical Analysis	People counting

Audio	
Audio Compression	G.711
Two-way Audio	Supported
Storage	
Edge Storage	Micro SD, up to 128GB
Network	
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x
Compatible Integration	ONVIF,API
Interface	
Audio I/O	Audio Cable/ 1/1 / Input: impedance 35kΩ; amplitude 2 V [p-p] / Output: impedance 600Ω; amplitude 2 V [p-p]
Network	10M/100M Base-TX Ethernet
General	
Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: Max 9W
Dimensions (Ø x H)	9.98"x3.4"x2.8"
Weight	1.28lb
Working Environment	-40°C ~ +60°C (-40°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)
Ingress Protection	IP67
Vandal Resistant	IK10

Optional Mounts Available



Junction Box Mount



Pole Mount

Unequaled Product Testing

- QUALITY
- RELIABILITY
- DISTANCE
- ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

Not Your Father's IP Cameras