

NVR 864

IP NVR




64 channel IP NVR

Features

- 820 Feet Video/Audio/Power over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- Audio capabilities Built-In
- 64 channel inputs available
- Supports HDD hot swap with RAID 0, 1, 5, 6, 10 storage scheme configurable
- Third-party IP cameras supported with ONVIF conformance
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- Up to 12MP Resolution recording capable
- Support H.265/H.264 video formats
- 8 SATA HDDs up to 8TB for each HDD
- Accurate and instant live access of all cameras and retrieval of recorded footage for 16 cameras simultaneously
- Supports various VCA detection alarm and search

- Remote access capable for P2P, UPnP, NTP, DHCP and PPPoE
- VMS software provided along with unlimited access to smart device app (Droid and iPhone)
- 320Mbps incoming bandwidth available
- Alarm In and Out standard
- Unlimited Tech Support for the life of the system

Dimensions

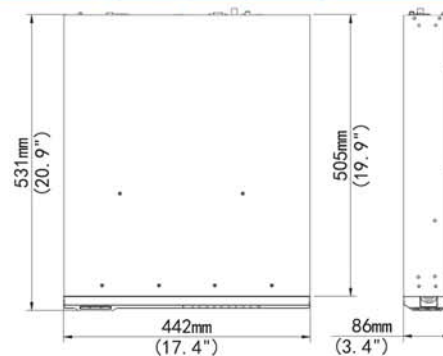

We guarantee at least 820' for Power & Video



201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com


Not Your Father's IP Cameras

864 IP NVR Specifications



| EC-NVR864 | |
|----------------------------------|---|
| Video/Audio Input | |
| IP Video Input | 64 ch |
| Two Way Audio Input | 1 ch, RCA |
| Network | |
| Incoming Bandwidth | 320Mbps |
| Outgoing Bandwidth | 320Mbps |
| Remote Users | 128 users (64 users can be logged in at one time) |
| Video/Audio Output | |
| HDMI/VGA Output | HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz |
| CVBS output | 1 ch, BNC |
| Recording Resolution | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Audio Output | 1 ch, RCA |
| Synchronous Playback | 16 ch |
| Decoding | |
| Compression | H.265/H.264 |
| Live view / Playback | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Capability | 3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1 |
| Hard Disk | |
| SATA | 8 SATA interfaces |
| Capacity | up to 8TB for each disk |
| External Interface | |
| Network Interface | 2 RJ-45 10M/100M self-adaptive Ethernet Interface |
| Serial Interface | 1 x RS232, 1 x RS485 |
| USB Interface | Rear panel: 2 x USB2.0, 1 x USB3.0 |
| Alarm in | 16 ch |
| Alarm Out | 4 ch |
| Power Output | 12V DC |
| General | |
| Power Supply | 100-240V AC |
| Power Consumption of NVR w/o HDD | ≤ 20 W |
| Power Consumption of HDD | ~ 5.5 W per 6Tb HDD ~ 6.5 W per 8Tb HDD |
| Working Temperature | -10°C ~ + 55°C (+14°F ~ +131°F) |
| Working Humidity | 10% ~ 90% |
| Dimensions | 86mm × 442mm × 531mm (3.4" × 17.4" × 19.9") |
| Weight w/o HDD | ≤ 5.13 Kg (11.31 lb) |

Rear Panel

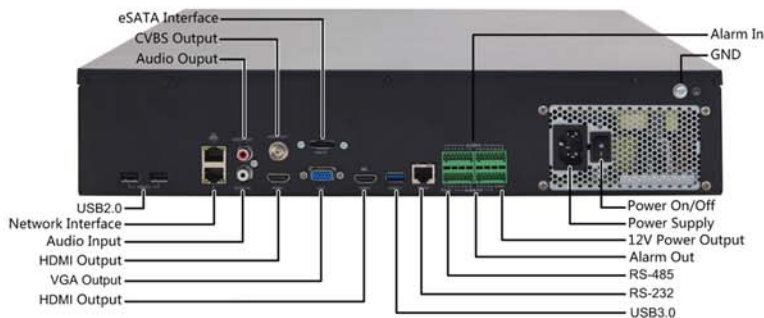

Unequaled Product Testing

- QUALITY
- RELIABILITY
- DISTANCE
- ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info

201 N. Elm St.
Kemp, TX 75143



866-264-0041
sales@envirocams.com

