

Any Weather / Long Distance / Plug-N-Play

# Outpost-10x

BULLET




## 2MP Starlight IR IP Camera with Motorized Lens

### Features

- 820 Feet Video/Audio/Power over normal Cat5e (Exclusive Enviro Cams Extended Mode)
- IP67 Weatherproof – Indoor or Outdoor
- Starlight Illumination included
- Wide Temperature Rating: -40° below to +140° F
- WDR (Sony's 120dB Wide Dynamic Range)
- 1/2.8", progressive scan, 2.0 megapixel, CMOS
- 2 Megapixel Resolution (1920x1080 max) – H.264/H.265/MJPEG options - Triple Stream capable
- 4.7-47mm Varifocal Auto-Focus Megapixel Zoom Lens
- Optically Clear Glass front protecting the lens
- Up to 320' Infrared Illumination with Intensity-Controlled Smart IR's
- Audio and Alarm inputs and outputs
- 9:16 Corridor Mode (Great for Hallways or narrow alleys)
- Supports POE and/or 12V DC (will fail-over to 12V if POE is lost) w/ wide voltage range of + or - 25%
- Optional Onboard Micro SD Card for stand-alone or POE loss Recording – with Automatic Download to NVR when POE is restored
- 2D and 3D Digital Noise Reduction options

### Dimensions

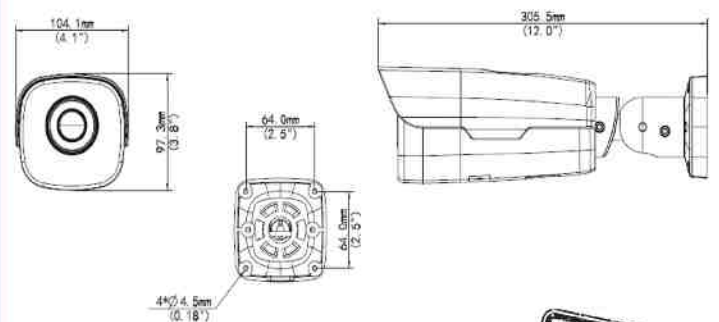

We guarantee at least 820' for Power & Video



201 N. Elm St.  
Kemp, TX 75143

**ENVIRO**  
cams

866-264-0041  
sales@envirocams.com

Not Your Father's IP Cameras



# Outpost Specifications



Camera	
Sensor	1/2.8", 2 megapixel, progressive scan CMOS
Lens	4.7~47mm@F1.4; P-Iris, AF automatic focusing and motorized zoom lens
Angle of View(H)	65° ~ 9°
Shutter	Auto/Manual, 1/10 ~ 1/100000s
Min. Illumination	Colour: 0.001 Lux (F1.4, AGC ON) / 0 with IR on
IR Range	320 ft IR range
Day/Night	IR-cut filter with auto switch (ICR)
S/N	>52dB
WDR	120dB
Noise Reduction	2D/3D
Video	
Max. Resolution	1920x1080
Video Compression	H.265, H.264, MJPEG
Frame Rate	Main Stream: 2MP (1920x1080): Max. 60 fps; Sub Stream: 2MP (1920x1080): Max. 60 fps; Third Stream:D1(720x576) : Max. 60fps
Video Streaming	Triple
9:16 Corridor Mode	Supported
Region Of Interest	Up to 8 areas
HLC and BLC	Supported
Evaluative Metering	Supported
OSD	Up to 8 OSDs
Privacy Mask	Up to 8 areas
Motion Detection	Up to 4 areas
Smart	
Behavior Detection	Intrusion, crossing line, motion detection
Exception Detection	Audio Detection
Intelligent Identification	Face detection, Defocus, Scene Change
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication

Audio	
Audio Compression	G.711
Two-way Audio	Supported
Suppression	Supported
Sampling Rate	8 KHZ
Storage	
Edge Storage	Micro SD, up to 128GB
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP
Compatible Integration	ONVIF(Profile S, Profile G), API
Interface	
Audio I/O	Audio Cable/ 2/1 / Input: impedance 35kΩ; amplitude 2 V [p-p] / Output: impedance 600Ω; amplitude 2 V [p-p]
Network	10M/100M Base-TX Ethernet
Serial Port	1 RS485
Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
General	
Power	12 V DC, or PoE (IEEE802.3 af) Power consumption: Max 13.7W
Dimensions (Ø x H)	12"x4.1"x3.8"
Weight	3.6lb
Working Environment	-40°C ~ +60°C (-40°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)
Ingress Protection	IP67
Reset Button	Supported

## Optional Mounts Available



Junction Box Mount



Pole Mount

## Unequaled Product Testing

-  QUALITY
-  RELIABILITY
-  DISTANCE
-  ENVIRONMENT

Customer Focused, Quality Driven!!



Dealer Info



201 N. Elm St.  
Kemp, TX 75143



866-264-0041  
sales@envirocams.com

Not Your Father's IP Cameras